


KNAPHEIDE®

SINCE 1848

Forestry Bodies



Standard Features

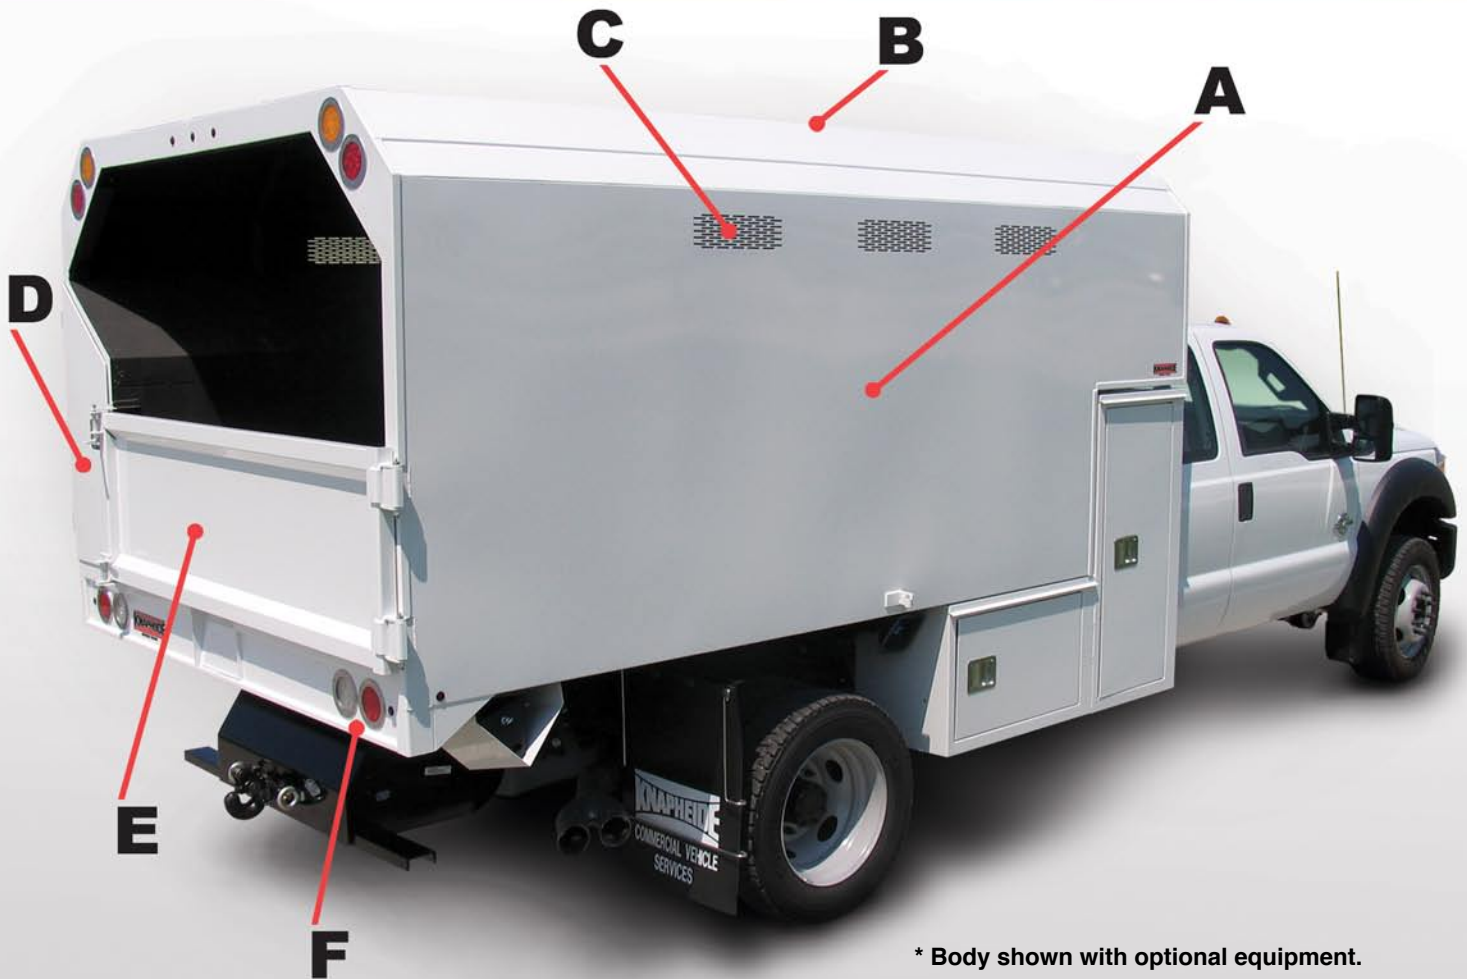

* Body shown with optional equipment.

- A)** 14 gauge galvaneal smooth side panels are excellent for advertising graphics
- B)** 16 gauge galvaneal roof panel reinforced with roof bow bracing
- C)** Punched vents in upper side panels
- D)** Full length ladder box with pole pruner shelf and lockable access door
- E)** 24" tall, 14 gauge galvaneal, double-panel tailgate swings open 270° degrees and latches in the open position
- F)** Recessed LED light to meet DOT standards

And other features not shown above:

- Corrosion protection is provided through complete immersion in Knapheide's 12 stage electrodeposition prime paint system
- Bodies are fully protected with Knapheide's water based undercoat
- Floor is comprised of 6" structural long sills, 10 gauge formed cross sills, and a 10 gauge floor plate

Available Models

	Model	Recommended Min. GVWR	Nominal Length	Height	Chip Capacity
Notched Bodies (24" cutout for KnapPack)	KFB12360NA	19,500 lbs.	10'	60"	11.4 yds.
	KFB13560NA	19,500 lbs.	11'	60"	13.0 yds.
	KFB14760NA	19,500 lbs.	12'	60"	14.0 yds.
	KFB17172NA	25,999 lbs.	14'	72"	23.0 yds.
	KFB19578NA	29,000 lbs.	16'	78"	25.0 yds.
Straight Bodies (No cutout for KnapPack)	KFB12360SA	19,500 lbs.	10'	60"	12.4 yds.
	KFB13560SA	19,500 lbs.	11'	60"	14.0 yds.
	KFB14760SA	19,500 lbs.	12'	60"	15.0 yds.
	KFB17172SA	25,999 lbs.	14'	72"	24.0 yds.
	KFB19578SA	29,000 lbs.	16'	78"	26.0 yds.



KFB13560NA with I-Pack KFPI24A-E

KFB14760NA with L-Pack KFPL2424A-E

KFB19578NA with L-Pack KFPL2424A-E

Hoists



Knapheide offers a full range of hoists with different lift capacities. Please contact your Knapheide representative to select the one that's right for your application.



Popular Options

- Wheel chock holders – 1 each side
- Pintle ball combo hitch or swivel pintle hitch
- Delete ladder box and pole pruner shelf
- Barn door style swing-out rear doors
- LED strobe lights
- Rear boom brace for aerial units
- Coal tar interior coating
- Outrigger pad holders
- Cone holder
- Cab guard and reinforced bumper for aerial units

Available Forestry Body Storage Packs

Model	Style	Pack Length	Pack Height	Width	Underbody Box Length	Underbody Box Height
KFPI24A	I-Pack	24"	50"	94"	N/A	N/A
KFPI34A	I-Pack	34"	50"	94"	N/A	N/A
KFPL2424A	L-Pack	24"	50"	94"	24"	22"
KFPL2436A	L-Pack	24"	50"	94"	36"	22"
KFPL2448A	L-Pack	24"	50"	94"	48"	22"

Adding the suffix -E to the above models denotes Extreme Security forestry body storage pack.
 Adding the suffix -EPL to the above models denotes Extreme Security forestry body storage pack with power latching.

Standard Forestry Body Storage Pack Features



KFPL2424A

- Two full width shelves extend across inside of entire pack
- Three combination stationary/swivel hooks are mounted in the passenger side compartment
- 2" thick, 14 gauge double panel door construction with internal bracing creates a rigid door
- Flush mounted doors and recessed hidden hinges create a pry-proof compartment
- Adjustable strikers and rotary style slammable latch with an internal cover
- Continuous automotive type bulb seal protects contents from the elements
- Storage packs are fully protected with Knapheide's water based undercoat
- Corrosion protection through complete immersion in Knapheide 12 stage electrodeposition prime paint system

Extreme Security Forestry Body Storage Pack Features



KFPI24A-E

Features listed below are in addition to the standard forestry body storage pack features.

- Large stainless steel door handles operate heavy duty rotary latches
- Reinforced rotary latches engage with heavy duty 1/2" diameter heat treated steel alloy striker pins
- Security pins can be inserted through the door and door frame to secure doors for additional security

Additional Features with Power Latching



KFPL2424A-EPL

Features listed below are in addition to the standard and extreme forestry body storage pack features.

- External stainless steel latches are removed which creates a smooth external door surface for graphics
- Electronic actuators are installed in door panels to activate the rotary latches
- Press the key fob and open only the selected door as each door is independently controlled
- When finished at the jobsite, close the door and it locks automatically
- Security pins are not included with the Power latching option

The Knapheide Manufacturing Company
 1848 Westphalia Strasse
 Quincy, Illinois 62305
 (217) 222-7131
www.knapheide.com
knapheide@knapheide.com

L72 5M 0810 A



Copyright© 2010 The Knapheide Manufacturing Company

For more information:

Specifications subject to change without notice.
 Some models shown with optional equipment.