

KNAPHEIDE

SINCE 1848




CRANE BODIES

KNAPHEIDE CRANE BODIES

Knapheide Crane Bodies are purpose-built to hold up under the most extreme of lifting conditions.

With all the industry-leading security and durability features of our Service Bodies, the Knapheide Crane Body is an easy choice.

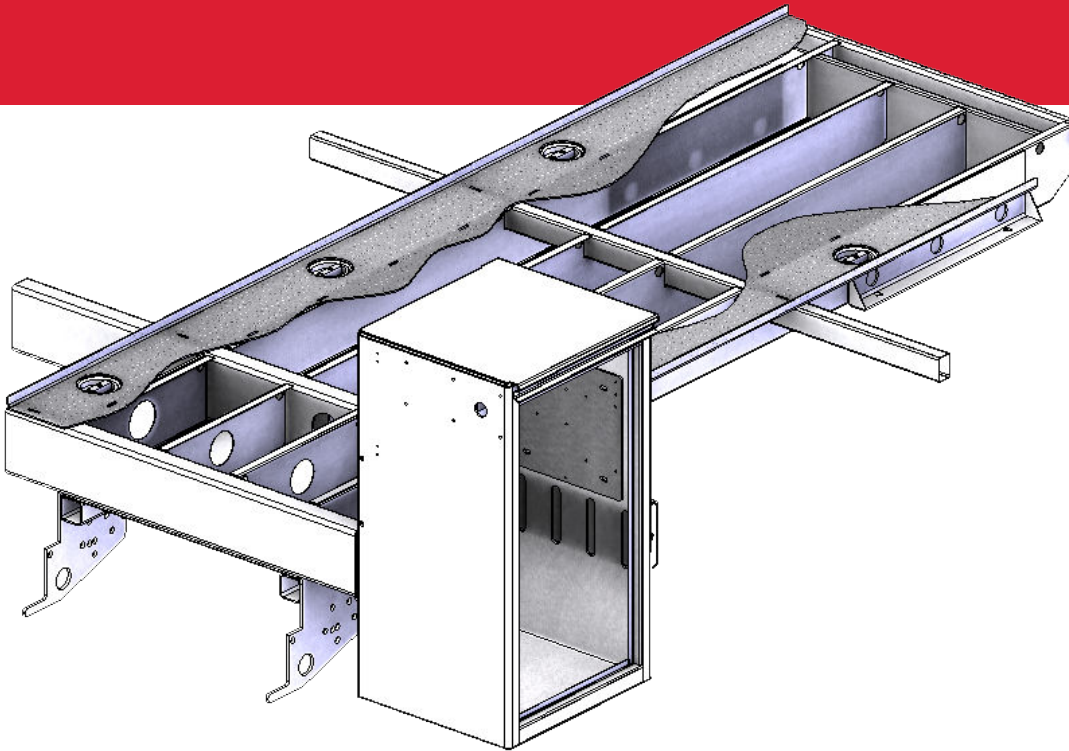

CRANE BODY UNDERSTRUCTURE

Knapheide 55 and 66 Crane Bodies feature our unique torq-isolator crane support system. The reinforced crane box transfers lift forces into the full-length torsion-box subframe and outriggers, not the side compartments.

-55 AND -66 MODELS

Knapheide 55 and 66 Crane Bodies are built with heavy lifting in mind. The 55 bodies are designed to support a maximum crane rating of 55,000 ft-lb., while the 66 support a maximum crane rating of 66,000 ft-lb. with ease. Both are designed to handle the rigors of your everyday extreme lifting using a unique torq-isolator support system understructure.

-30 MODELS

With the storage and efficiency of a service body, the Knapheide 30 Crane Body is specifically designed and reinforced to support up to a 30,000 ft-lb. crane. This versatile size and functionality makes it an easy choice for field applications.

POPULAR VOCATIONS



HEAVY
CONSTRUCTION



AGRICULTURE



PREVENTATIVE
MAINTENANCE



OIL/MINING/GAS

A. DOUBLE PANELED DOORS
made of galvanized steel (14-gauge outer panel, 20-gauge inner panel) are reinforced with internal braces for durability

B. 3-POINT T-HANDLE LATCHES
ensure your compartment doors stay closed and are individually lockable

C. OVERLAP DOORS
on front vertical and horizontal compartments


D. BODY SHELL
rugged 10- and 14-gauge two-sided A-40 galvanized steel

E. TWO CHROME GRAB HANDLES

F. INTEGRATED LED S/T/T AND B/U, LED STROBES
with (8) selectable patterns and built-in reflectivity mounted to external rear light boxes made of UV-resistant ABS material

G. BOLT-ON SLAMMABLE TAILGATE

H. RUBBER FENDERETTES
(model 6132DLHR-66 only)

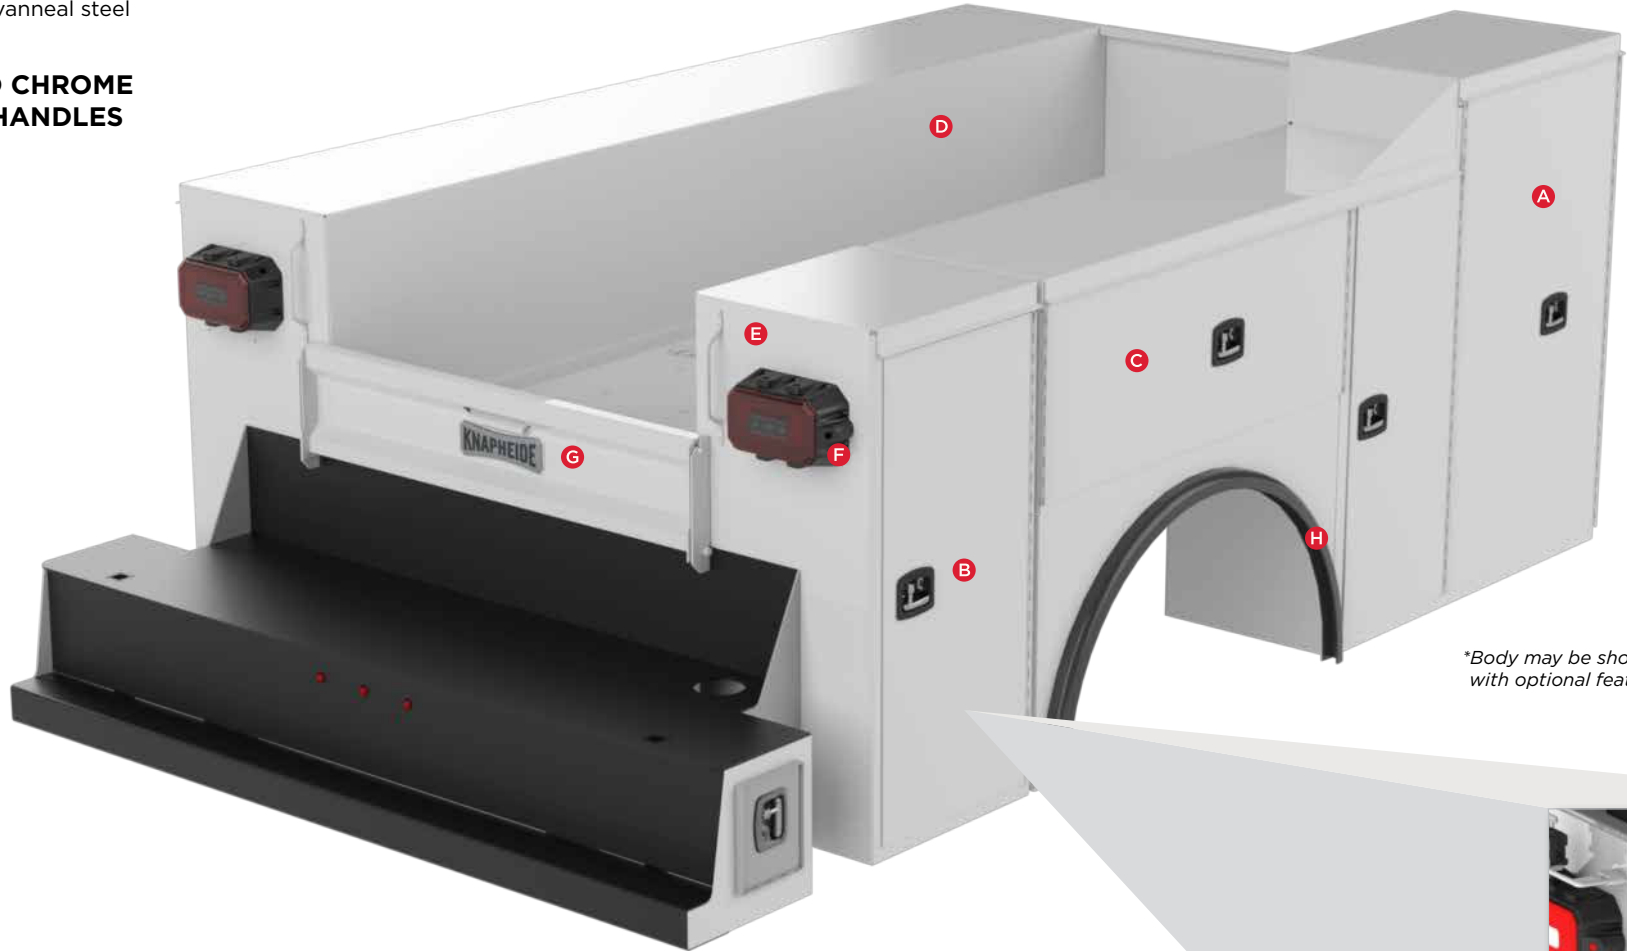

**Body may be shown with optional features*

FEATURES NOT SHOWN

SIDE WALL SHELF CLIPS
with 2" adjustable spacing

14-GAUGE INNER PARTITIONS OF COMPARTMENTS

COMPLETE UNDERCOATING
provides protection from corrosion and road debris

CARGO TIE-DOWNS
are D-ring type and recessed in floor, with a 6,000-lb. capacity (4 in 108" bodies, 6 in 132" bodies)

PRE-DRILLED MOUNTING HOLES
on crane pedestal for ease of installing most popular cranes

ELECTRODEPOSITION PRIME-PAINT SYSTEM
provides superior corrosion resistance

COMPARTMENT FEATURES



DOUBLE-SPRING OVER-CENTER RETAINER
on vertical compartment doors eliminate involuntary swing



NEOPRENE DOOR SEALS
protect compartments from the weather



COMPARTMENT INTERIOR
medium gloss, mar-resistant, light gray finish brightens interiors and makes finding contents easier



CONTINUOUS STAINLESS STEEL HINGES
are pry-proof and corrosion-resistant

REAR CRANE COMPARTMENT



FIXED SHELF
in crane compartment



DRIP PAN
located under crane mount



12-GAUGE BOTTOM AND END PANELS
applies to all compartments

**compartment images shown include optional features*

A. REINFORCED REAR VERTICAL CURB SIDE COMPARTMENT
eliminates flexing and twisting of side packs

B. DOUBLE PANELED DOORS
made of 20-gauge galvanized steel are reinforced with internal braces for durability

C. AUTOMOTIVE-QUALITY, ROTARY-STYLE LATCHES
make opening and closing easy


D. BODY SHELL
rugged 10- and 14-gauge two-sided A-40 galvanized steel

E. TORSION BOX UNDERSTRUCTURE
design strengthens floor to resist flexing


F. INTEGRATED LED S/T/T AND B/U, LED STROBES
with (8) selectable patterns and built-in reflectivity for additional safety**
*Additional wire harness required for strobe lights
**Covered under 3-year limited warranty

G. BOLT-ON SLAMMABLE TAILGATE

H. EXCLUSIVE “RETURN FLANGE” FLOOR DESIGN
provides support, adds floor strength, and eliminates a rust-prone exposed seam between floor and side compartments

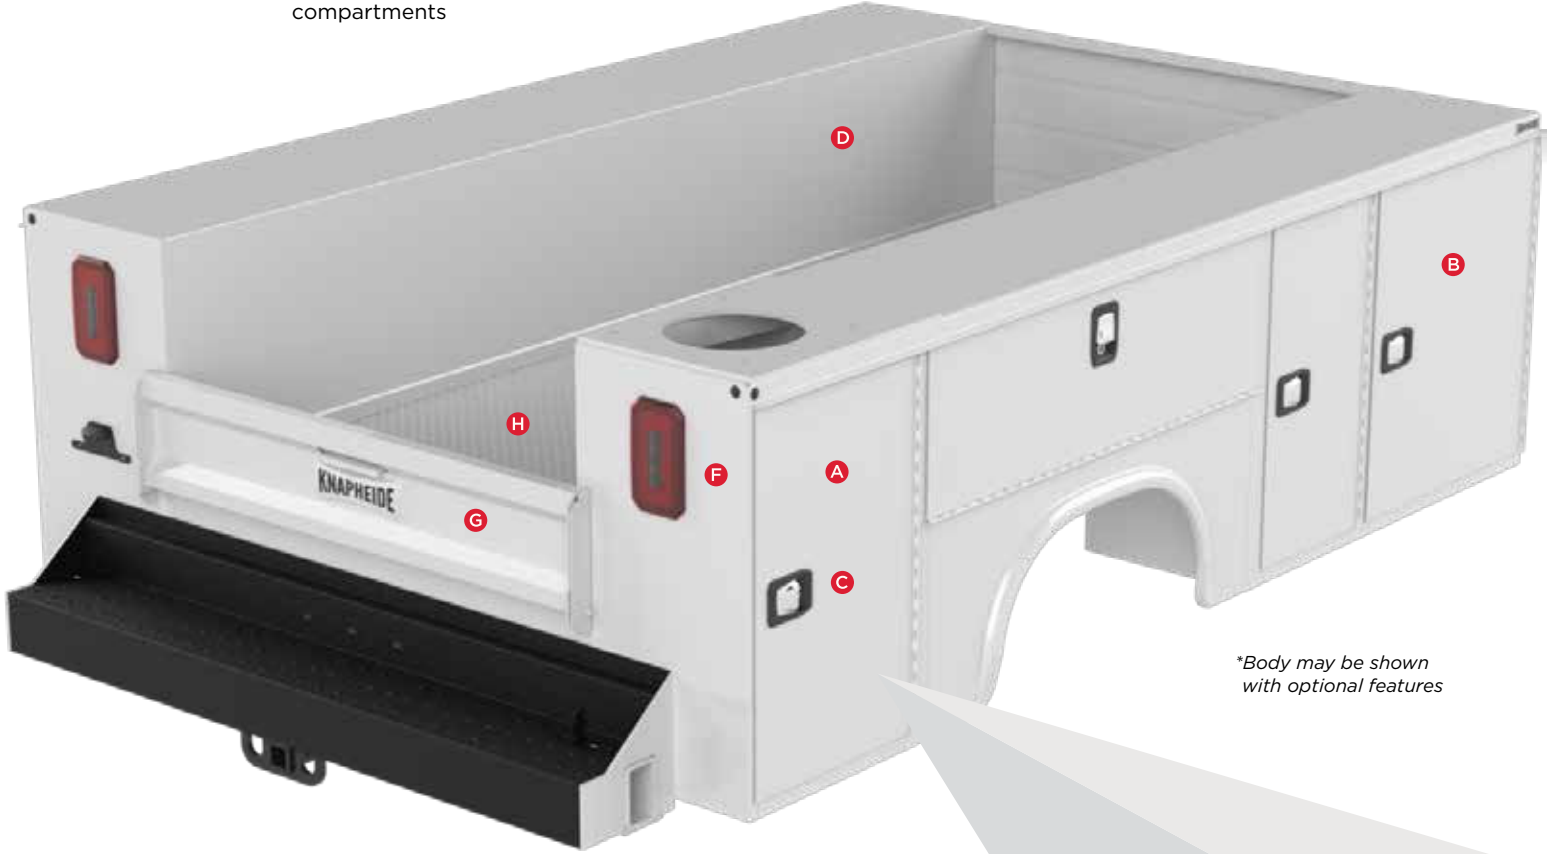

**Body may be shown with optional features*

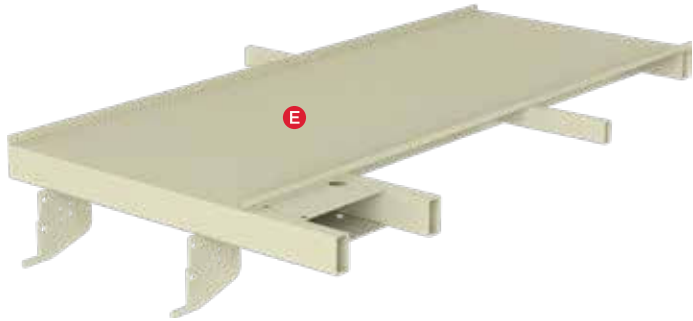

FEATURES NOT SHOWN

ELECTRODEPOSITION PRIME-PAINT SYSTEM
provides superior corrosion resistance

DRIP PAN
shipped loose for installation under the crane

COMPARTMENT FEATURES



DOUBLE-SPRING OVER-CENTER RETAINER
on vertical compartment doors eliminate involuntary swing



NEOPRENE DOOR SEALS
protect compartments from the weather



ADJUSTABLE DIVIDER SHELVES
250-lb. capacity



CONTINUOUS STAINLESS STEEL HINGES
are pry-proof and corrosion-resistant



INTERIOR LIGHT GUARDS
protect recessed lighting and wiring



CRANE REINFORCEMENT KIT

THE CRANE REINFORCEMENT KIT
allows you to incorporate a crane up to 4,000 lb. capacity (30,000 ft-lb. max.) onto the rear curb side corner of your body



REQUEST A QUOTE



Visit knapheide.com/quote and fill out the form to receive a quote and additional product information.

POPULAR OPTIONS

OPTIONAL SHELVING AND DRAWER PACKAGES

AVAILABLE FOR -55 AND -66 BODIES ONLY

- | | |
|--|---|
| 1 Gas bottle retainer (2 bottles), vented top and bottom, (2) combination stationary/swivel hooks.
For non-R models (no raised compartment), the bottle brackets are replaced with (2) adjustable divider shelves. | 4 Pull-out tray (500-lb. capacity), 3/4" plywood lined |
| 2 One shelf with (8) dividers each | 5 (2) adjustable divider shelves with (4) dividers each |
| 3 Fixed shelf (standard) | 6 18-drawer cabinet and book rack |
| | 7 7-drawer unit: (1) 7", (3) 5", and (3) 3" on full extension slides with 250-lb. capacity |

108 SERIES

PACKAGE A



PACKAGE B



PACKAGE C



132 SERIES

PACKAGE A



PACKAGE B



PACKAGE C





REQUEST A QUOTE



Visit knapheide.com/quote and fill out the form to receive a quote and additional product information.

POPULAR OPTIONS

BUMPERS

-55 AND -66 CRANE BODIES

- 21" deep step and work surface (DLH Series bumper has lower step, 5" deep)
- Grip tape supplied for step surfaces
- Through-compartment with door on each side (DL Series clear opening 6-3/4"x6-1/8", DLH Series clear opening 6-3/4"x8-1/8")
- Removable vise bracket with receiver tube
- Weight with receiver tube for outrigger: 438 lb.(DL Series), 611 lb. (DLH Series)



DL SERIES



DLH SERIES

-30 CRANE BODIES

The outrigger receiver bumper is a heavy-duty Galva-Grip bumper.

- Bumper and kick-plate are 12-gauge galvalume
- Grip tread punched into the step surface
- 4"x6"x3/8" outrigger receiver tube
- Features an optional 2" towing receiver hitch tube



**OUTRIGGER
RECEIVER BUMPER**



REQUEST A QUOTE



Visit knapheide.com/quote and fill out the form to receive a quote and additional product information.

POPULAR OPTIONS



ROCK GUARDS



CARGO TIE DOWNS
Already standard on 55 and 66 models



STEEL MECHANIC DRAWERS



MASTER LOCKING SYSTEM



ALUMINUM DRAWERS



LED COMPARTMENT LIGHTING



GAS BOTTLE RETAINER

MODEL OPTIONS

-55 AND -66 CRANE BODIES

MODEL	BODY WEIGHT ¹	COMPARTMENT DEPTH	BODY HEIGHT	MAXIMUM CRANE RATING	CHASSIS CA	CHASSIS MINIMUM GVWR	MAXIMUM TIRE SIZE
6108DL-55	2,612 lbs.	22"	44"	55,000 ft-lb.	60"	15,000 lb. (17,500 for 8,600-lb. crane)	19.5" diameter rims, 34" tire diameter
6018DLR-55	2,665 lbs.	22"	44", 60" raised front	55,000 ft-lb.	60"	15,000 lb. (17,500 for 8,600-lb. crane)	19.5" diameter rims, 34" tire diameter
6132DL-55	3,020 lbs.	22"	44"	55,000 ft-lb.	84"	15,000 lb. (17,500 for 8,600-lb. crane)	19.5" diameter rims, 34" tire diameter
6132DLR-55	3,070 lbs.	22"	44", 60" raised front	55,000 ft-lb.	84"	15,000 lb. (17,500 for 8,600-lb. crane)	19.5" diameter rims, 34" tire diameter
6132DLHR-66	3,276 lbs.	22"	52", 60" raised front	66,000 ft-lb.	84"	19,000 lb. (27,000 for 10,000-lb. crane)	22.5" diameter rims, 46" tire diameter

-30 CRANE BODIES

MODEL	BODY WEIGHT ¹	COMPARTMENT DEPTH	BODY HEIGHT	MAXIMUM CRANE RATING	CHASSIS CA	CHASSIS MINIMUM GVWR	MAXIMUM TIRE SIZE
6108DL-30	2,306 lbs.	20"	40"	30,000 ft-lb.	60"	15,000 lb.	19.5" diameter rims, 34" tire diameter
6132DL-30	2,721 lbs.	20"	40"	30,000 ft-lb.	84"	15,000 lb.	19.5" diameter rims, 34" tire diameter
6132DLR-30	2,757 lbs.	20"	40", 60" raised front	30,000 ft-lb.	84"	15,000 lb.	19.5" diameter rims, 34" tire diameter

¹Body weight does not include bumper or shelving
^{*}Final determination of chassis specifications and minimum GVWR required for body, crane and other mounted equipment is the responsibility of the installer. See crane manufacturer's specifications for minimum chassis requirements.

COMMITMENT TO CORROSION RESISTANCE

Corrosion won't be a concern when you buy quality Knapheide products. To give you the best corrosion protection, we utilize a state-of-the-art, custom-designed, 12-step, SST cathodic electrodeposition finishing system, called "E-Coat."

It bonds prime paint to steel by an electroplating process to give you a superior coat of primer, resulting in better corrosion protection compared to spraying methods.

This system allows us to create products with the highest level of corrosion resistance available.



FOLLOW US
LIKE US
TAG US



SIX YEAR, LIMITED TIME WARRANTY



NO RUST
THROUGH



DOOR HINGES
WILL NOT FAIL OR
COME OFF BODY



LATCHES AND LOCK
CYLINDERS WILL NOT
FAIL TO OPERATE



SHELVES WILL NOT
BEND UNDER MAX.
LOAD OF 250 LBS.

TO LEARN MORE VISIT
www.knapheide.com/warranty



NEVER SETTLE

If you are going to be a leader, it takes more than building a high-quality product. It means never being totally satisfied with that product, no matter how high quality it may be. It requires constant vigilance and a willingness to take a chance on something new. And it means exceeding expectations every time. As the industry changes, one thing never will—our commitment to making customers like you as productive and efficient as possible. We know you don't settle, and we don't either. That's why we want you never to settle for anything less than Knapheide on the back of your truck.

KNAPHEIDE. NEVER SETTLE.



The Knapheide Manufacturing Company
1848 Westphalia Strasse | Quincy, IL 62305

217-222-7131

www.knapheide.com