

KNAPHEIDE
SINCE 1848



RAM
STEEL
GOOSENECK BODIES

KNAPHEIDE STEEL GOOSENECK BODIES



STEEL GOOSENECK BODIES

Versatility with storage solutions to meet every need, Knapheide Gooseneck Bodies are an easy choice. Rugged construction, enhanced styling and secure storage give you a body that can haul it all.

Reliable offerings range from the mid-level PGTB, skirted PGTC, the deluxe PGTD and PGTE.



GOOSENECK TURNOVERBALL HITCH

A B&W Turnoverball®, rated at 30,000 lbs. gross trailer weight, with 7,500 lb. tongue weight. Currently in all PGT models.

POPULAR VOCATIONS



CONSTRUCTION



AGRICULTURE



LANDSCAPING/
TREE CARE



OIL/MINING/GAS

PGTB GOOSENECK BODIES



PGTB-116
*Body may be shown with optional features

- A. RUB RAILS**
installed on both sides of bodies for strap, side and stake pocket protection
- B. RUGGED 1/8" THICK TREAD PLATE FLOOR**
- C. B&W TURNOVERBALL®**
rated at 30,000 lbs. gross trailer weight, with 7,500 lb. tongue weight
- D. BOLT ON RECEIVER HITCH**
Choose from 16K or 21K hitch, ordered separately to ship loose
- E. FORMED, INTEGRATED BULKHEAD**
with stylized screened window and tapered design for improved visibility

- F. 7-WAY TRAILER PLUG**
at rear of body
- G. DURABLE OVEN-CURED COAT**
finish painted black
- H. ALL LED CLEARANCE AND MARKER LIGHTS**
for visibility and added safety
- I. INTEGRATED OVAL LED B/U AND S/T/T LIGHTS**
included in bulkhead and rear skirt
- J. SAFETY CHAIN ATTACHMENT POINTS**
included with gooseneck hitch

FEATURES NOT SHOWN

- 12-GAUGE FORMED CROSS SILLS
- ELECTRODEPOSITION PRIME-PAINT SYSTEM
provides superior corrosion resistance
- INTEGRATED DRIVER SIDE FUEL FILL CUP

PGTC GOOSENECK BODIES



PGTC-1110
*Body may be shown with optional features

- A. SKIRTED GOOSENECK STYLING**
with integrated front and rear toolboxes
- B. RUB RAILS**
installed on both sides of bodies for strap, side and stake pocket protection
- C. RUGGED 1/8" THICK TREAD PLATE FLOOR**
with 6" structural channel long sills (4" on 8' models)
- D. B&W TURNOVERBALL®**
rated at 30,000 lbs. gross trailer weight, with 7,500 lb. tongue weight
- E. BOLT ON RECEIVER HITCH**
Choose from 16K or 21K hitch, ordered separately to ship loose
- F. 7-WAY TRAILER PLUG**
at rear of body
- G. SAFETY CHAIN ATTACHMENT POINTS**
included with gooseneck hitch
- H. DURABLE OVEN-CURED COAT**
finish painted black
- I. ALL LED CLEARANCE AND MARKER LIGHTS**
for visibility and added safety
- J. INTEGRATED OVAL LED B/U AND S/T/T LIGHTS**
included in bulkhead and rear skirt
- K. CONTINUOUS STAINLESS STEEL HINGES**
are pry-proof and corrosion-resistant
- L. DOUBLE PANELED DOORS**
consist of 20-gauge, two sided A-40 galvaneal steel
- M. AUTOMOTIVE QUALITY, ROTARY-STYLE LATCHES**
make opening and closing easy

FEATURES NOT SHOWN

- 12-GAUGE FORMED CROSS SILLS
- NEOPRENE DOOR SEALS
protect compartments from the weather
- INTEGRATED DRIVER SIDE FUEL FILL CUP
- ADJUSTABLE SECURITY RING STRIKERS
provide a weather-tight seal
- ELECTRODEPOSITION PRIME-PAINT SYSTEM
provides superior corrosion resistance
- DOUBLE-SPRING OVER-CENTER DOOR RETAINER
eliminates involuntary door swing
- INTERIOR COVER
protects internal latch from damage

PGTD GOOSENECK BODIES



PGTD-114
**Body may be shown with optional features*

- A. DOUBLE PANELED DOORS**
consist of 20-gauge, two sided A-40 galvalneal steel
- B. FLIP TOP COMPARTMENTS**
8” deep and with exterior release latch. Flip tops utilize nitrogen gas struts for smooth opening and closing
- C. RUGGED 1/8” THICK TREAD PLATE FLOOR**
- D. 36” HIGH FRONT COMPARTMENTS**
each with 250 lb. capacity shelves
- E. BOLT ON RECEIVER HITCH**
Choose from 16K or 21K hitch, ordered separately to ship loose
- F. FORMED, INTEGRATED BULKHEAD**
with stylized screened window and tapered design for improved visibility
- G. 7-WAY TRAILER PLUG**
at the rear of the body
- H. DURABLE OVEN-CURED COAT**
finish painted black
- I. ALL LED CLEARANCE AND MARKER LIGHTS**
for visibility and added safety

- J. UPGRADED REAR MOUNT LIGHTING SYSTEM**
features LED S/T/T and B/U, LED strobe option* with (8) selectable patterns, and built-in reflectivity for additional safety**
*Additional wire harness required for strobe lights
**Lights covered by 3-year limited warranty
- K. CONTINUOUS STAINLESS STEEL HINGES**
are pry-proof and corrosion-resistant
- L. AUTOMOTIVE QUALITY, ROTARY-STYLE LATCHES**
make opening and closing easy
- M. FULL HEIGHT SLAM TAILGATE**
with center mounted release handle
- N. B&W TURNOVERBALL®**
rated at 30,000 lbs. gross trailer weight, with 7,500 lb. tongue weight
- O. GALVANNEAL FENDERETTES**
are welded on
- P. 7” DEEP REAR STEP**
makes accessing cargo area safe and easy

FEATURES NOT SHOWN

- 12-GAUGE FORMED CROSS SILLS**
3” formed
- 250-LB. CAPACITY SHELVES MADE OF SPANGLED STEEL**
(2 in each front vertical compartment)
- DOUBLE-SPRING OVER-CENTER DOOR RETAINER**
eliminates involuntary door swing

- ELECTRODEPOSITION PRIME-PAINT SYSTEM**
provides superior corrosion resistance
- ADJUSTABLE SECURITY RING STRIKERS**
provide a weather-tight seal

- NEOPRENE DOOR SEALS**
protect compartments from the weather
- INTERIOR COVER**
protects internal latch from damage

PGTE GOOSENECK BODIES



PGTE-1110
**Body may be shown with optional features*

- A. SKIRTED GOOSENECK STYLING**
with integrated front and rear toolboxes
- B. 36” HIGH FRONT COMPARTMENTS**
each with 250 lb. capacity shelves
- C. RUB RAILS**
installed on both sides of bodies for strap, side and stake pocket protection
- D. RUGGED 1/8” THICK TREAD PLATE FLOOR**
- E. B&W TURNOVERBALL®**
rated at 30,000 lbs. gross trailer weight, with 7,500 lb. tongue weight
- F. BOLT ON RECEIVER HITCH**
Choose from 18K or 21K hitch, ordered separately to ship loose
- G. 7-WAY TRAILER PLUG**
at the rear of the body
- H. SAFETY CHAIN ATTACHMENT POINTS**
included with gooseneck hitch
- I. DURABLE OVEN-CURED COAT**
finish painted black
- J. ALL LED CLEARANCE AND MARKER LIGHTS**
for visibility and added safety
- K. INTEGRATED OVAL LED B/U AND S/T/T LIGHTS**
included in bulkhead and rear skirt
- L. CONTINUOUS STAINLESS STEEL HINGES**
are pry-proof and corrosion-resistant
- M. DOUBLE PANELED DOORS**
consist of 20-gauge, two sided A-40 galvalneal steel
- N. AUTOMOTIVE QUALITY, ROTARY-STYLE LATCHES**
make opening and closing easy

FEATURES NOT SHOWN

- 12-GAUGE FORMED CROSS SILLS**
- NEOPRENE DOOR SEALS**
protect compartments from the weather
- DOUBLE-SPRING OVER-CENTER DOOR RETAINER**
maintenance free door retainer eliminates involuntary door swing

- ADJUSTABLE SECURITY RING STRIKERS**
provide a weather-tight seal
- ELECTRODEPOSITION PRIME-PAINT SYSTEM**
provides superior corrosion resistance

- INTERIOR COVER**
protects internal latch from damage

POPULAR OPTIONS

P G T B / P G T C



ROUGHNECK CONTRACTOR PACKAGE

Underbody toolboxes do not apply for PGTC



4" REMOVABLE SIDE BOARDS



ABOVE BODY AND UNDERBODY TOOLBOXES

Underbody toolboxes do not apply for PGTC



3/16" TREAD PLATE FLOOR

P G T D



3/16" TREAD PLATE FLOOR



ADDITIONAL ALUMINUM TREAD PLATE OVERLAY

P G T E



3/16" TREAD PLATE FLOOR



6" STAKE RACK SET

POPULAR OPTIONS

PGTD / PGTE



CTECH DRAWER SETS



CARGO D-RINGS



LED COMPARTMENT LIGHTS



POWER LOCKS

REQUEST A QUOTE




Visit knapheide.com/quote and fill out the form to receive a quote and additional product information.



MODEL OPTIONS


PGTB

MODEL	LENGTH	WIDTH	WEIGHT	APPLICATION	SWING RADIUS	LONG SILL SPACING
PGTB-708-R	7'0"	84"	771 lb.	36" CA SRW	58.77"	42"
PGTB-898-R	8'9"	84"	933 lb.	56" CA SRW	60.25"	42"
PGTB-968	9'6"	84"	980 lb.	60" CA SRW	66.86"	34"
PGTB-89-R	8'9"	95.75"	1,000 lb.	56" CA DRW	63.57"	42"
PGTB-96	9'6"	95.75"	1,045 lb.	60" CA DRW	69.75"	34"
PGTB-116	11'6"	95.75"	1,208 lb.	84" CA DRW	69.75"	34"

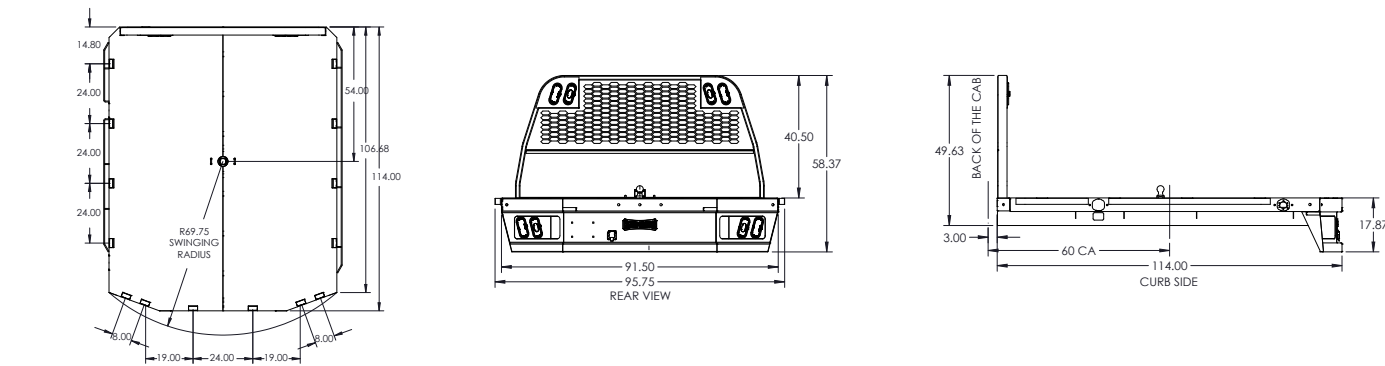


PGTD

MODEL	LENGTH	WIDTH	WEIGHT	APPLICATION	SWING RADIUS	LONG SILL SPACING
PGTD-848-R	8'11"	82.5"	1,367 lb.	56" CA SRW	60.83"	42"
PGTD-948	9'11"	82.5"	1,509 lb.	60" CA SRW	68.81"	34"
PGTD-84-R	8'11"	96"	1,471 lb.	56" CA DRW	63.33"	42"
PGTD-94	9'11"	96"	1,640 lb.	60" CA DRW	71.78"	34"
PGTD-114	11'11"	96"	1,968 lb.	84" CA DRW	71.78"	34"

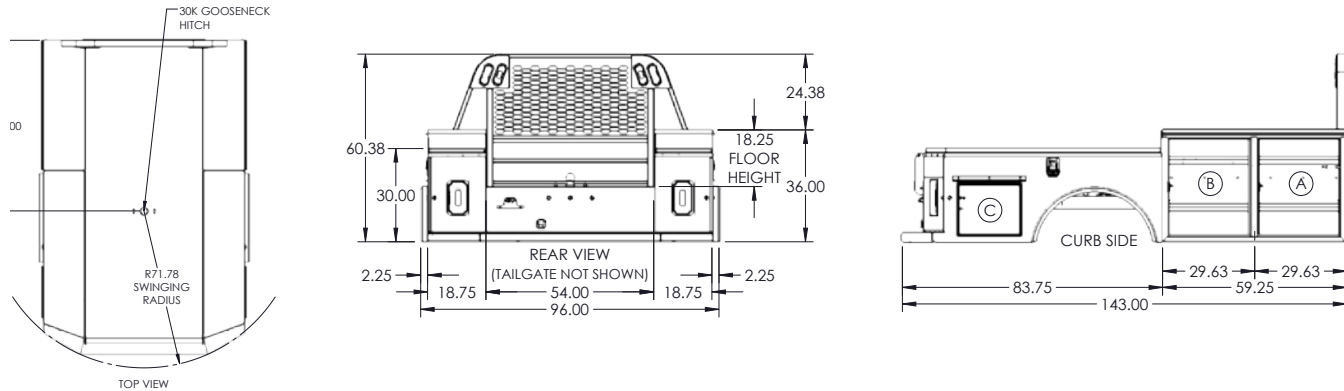


PGTC

MODEL	LENGTH	WIDTH	WEIGHT	APPLICATION	SWING RADIUS	LONG SILL SPACING
PGTC-868-R	8'6"	84.25"	1,135 lb.	56" CA SRW	57.75"	42"
PGTC-9108	9'10"	84.25"	1,249 lb.	60" CA SRW	70.11"	34"
PGTC-86-R	8'6"	96"	1,225 lb.	56" CA DRW	61.40"	42"
PGTC-910	9'10"	96"	1,372 lb.	60" CA DRW	72.94"	34"
PGTC-1110	11'10"	96"	1,638 lb.	84" CA DRW	72.94"	34"

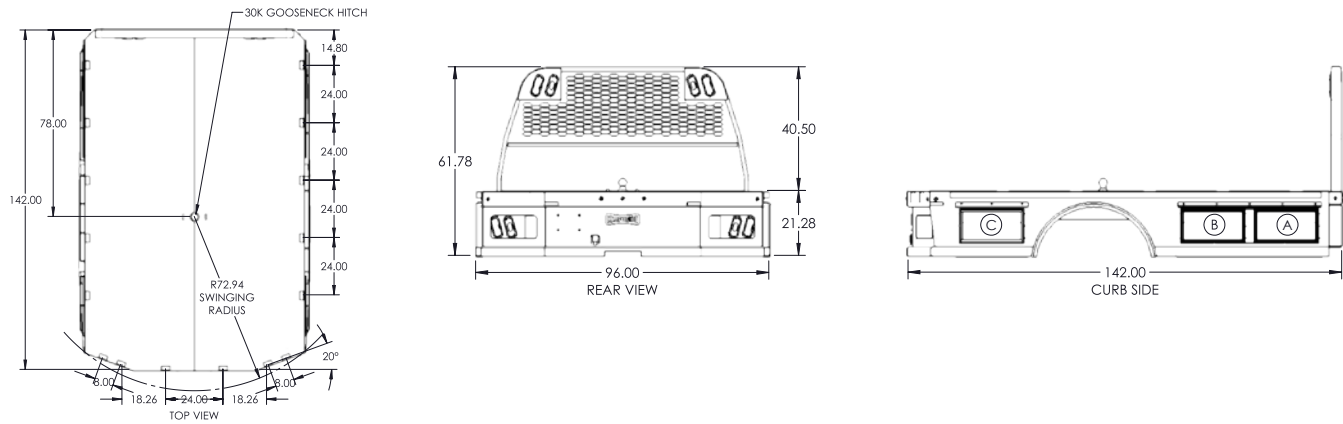

PGTE

MODEL	LENGTH	WIDTH	WEIGHT	APPLICATION	SWING RADIUS	LONG SILL SPACING
PGTE-868-R	8'6"	84.25"	1,112 lb.	56" CA SRW	57.75"	42"
PGTE-9108	9'10"	84.25"	1,238 lb.	60" CA SRW	70.11"	34"
PGTE-86-R	8'6"	96"	1,201 lb.	56" CA DRW	61.40"	42"
PGTE-910	9'10"	96"	1,360 lb.	60" CA DRW	72.94"	34"
PGTE-1110	11'10"	96"	1,657 lb.	84" CA DRW	72.94"	34"

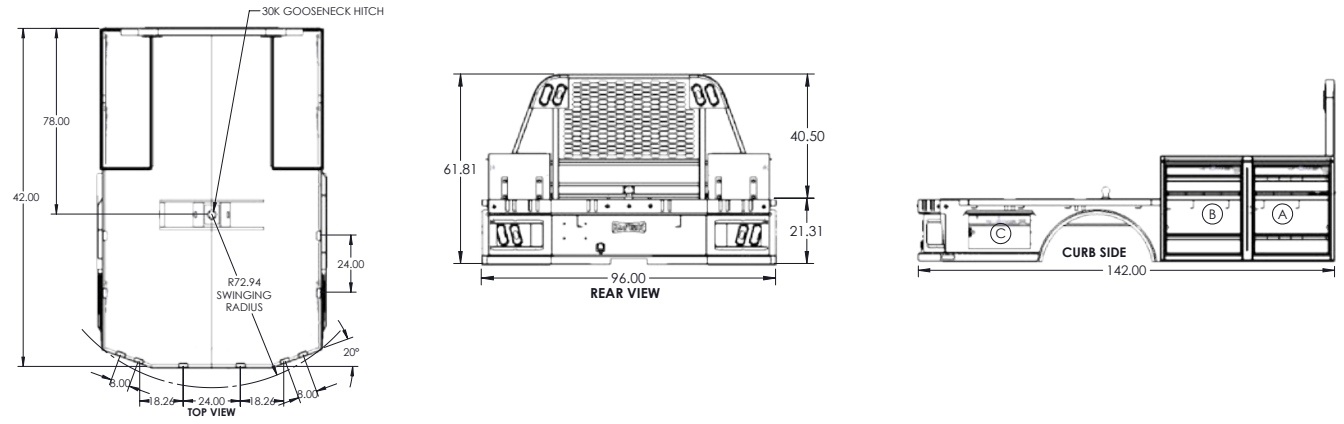

COMMITMENT TO CORROSION RESISTANCE

Corrosion won't be a concern when you buy quality Knapheide products. To give you the best corrosion protection, we utilize a state-of-the-art, custom-designed, 12-step, SST cathodic electrodeposition finishing system, called "E-Coat."

It bonds prime paint to steel by an electroplating process to give you a superior coat of primer, resulting in better corrosion protection compared to spraying methods.

This system allows us to create products with the highest level of corrosion resistance available.



FOLLOW US
LIKE US
TAG US



THREE YEAR, LIMITED TIME WARRANTY



NO RUST
THROUGH



FREE FROM
DEFECTS IN
WORKMANSHIP



FREE FROM
DEFECTS IN
MATERIALS

TO LEARN MORE VISIT
www.knapheide.com/warranty



NEVER SETTLE

If you are going to be a leader, it takes more than building a high-quality product. It means never being totally satisfied with that product, no matter how high quality it may be. It requires constant vigilance and a willingness to take a chance on something new. And it means exceeding expectations every time. As the industry changes, one thing never will—our commitment to making customers like you as productive and efficient as possible. We know you don't settle, and we don't either. That's why we want you never to settle for anything less than Knapheide on the back of your truck.

KNAPHEIDE. NEVER SETTLE.



The Knapheide Manufacturing Company
1848 Westphalia Strasse | Quincy, IL 62305
217-222-7131
www.knapheide.com