

KNAPHEIDE VAN EQUIPMENT INSTALLATION INSTRUCTIONS DROP DOWN DOOR KIT DR40-18

KNAPHEIDE
SINCE 1848

DOCUMENT # 68299-01




33897682 Hardware Kit		
QTY	PART #	DESCRIPTION
4	33913838	M6 x 10 Ratchet HD Screw
4	33897091	Spring Nut / ESMK

33897725 Hardware Kit		
QTY	PART #	DESCRIPTION
7	33897089	M6 x 12 Raised Flange Screw
7	33897092	M6 Pawl Nut

The Drop Down Door Kit DR40-18 can be mounted on all Wide-4 Shelf Staxx. The kit includes a door with an attached hinge and handle, latch plates, and mounting screws and nuts.

NOTE: The drop down door kit is designed to mount to the upgradeable shelf.

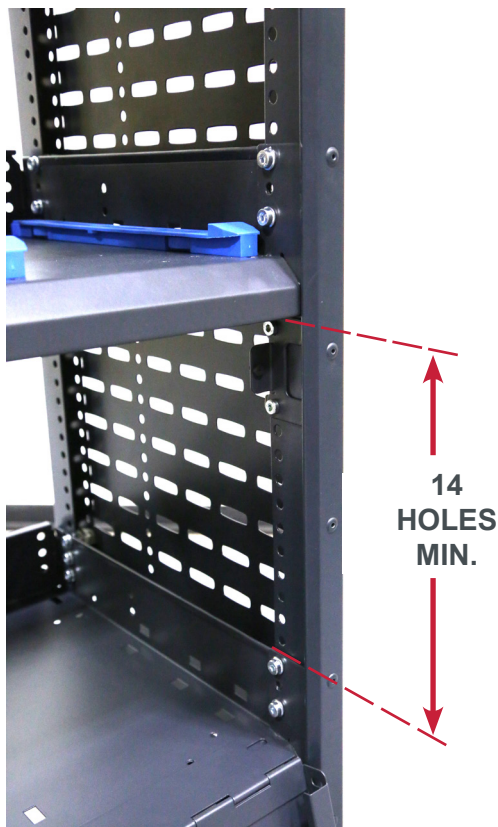

Determine the desired location to mount the door kit. Ideally there will be another shelf located above this position.

NOTE: The minimum required spacing is 14 holes between the top of the upgradeable shelf and the bottom of the next shelf.



Install latch plates at the upper right and left side of the shelf opening.

NOTE: Screws should be mounted through the latch plates with the nut on the opposite side of the end panel.

This document must not be copied or communicated to a third party without the expressed authorization of The Knapheide Manufacturing Company.

FOR REF ONLY

Printed copies are uncontrolled.



Open the door hinge and place the underside of the door hinge over the top/front edge of the upgradeable shelf. Line up the holes in the door hinge with the holes along the front of the shelf.



Secure the door and hinge assembly to the shelf with the hardware provided. Make sure that all holes along the hinge are filled.

NOTE: Prior to tightening down the hinge, push the door towards the back of the shelf to ensure proper alignment of holes. This will help ensure that the door has sufficient contact with the latch plates when closed.

Close the door and check for interference. Make adjustments as needed.

NOTE: Upgradeable shelf dividers **are** compatible with the Drop Down Door.