




The ProSafe Lashing Rail can be mounted on the front or rear Shelf Staxx end panels.

The ProSafe Lashing Rail comes with mounting screws and nuts.

1000002820 HARDWARE KIT		
QTY	PART #	DESCRIPTION
4	71004896	SCREW (M6 X 16)
4	71003884	PAWL NUT (M6)

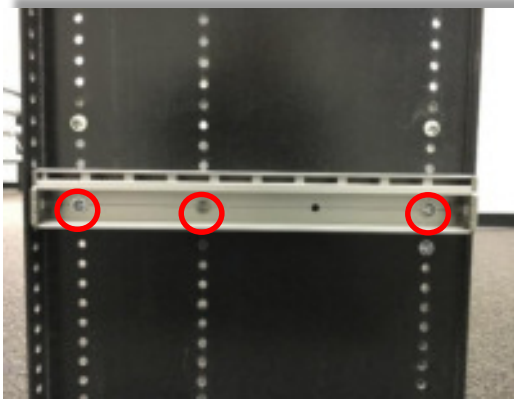

1. Determine desired location to mount the ProSafe Lashing rail.

**NOTE:** The rubber buffer strip must be removed prior to installation.

2. Making sure the rail is horizontal, use the 3 pre-drilled holes in the end panel that are available to secure the lashing rail.



3. After tightening the screws be sure to replace the rubber buffer strip. Start on one end, pressing the rubber strip into the lashing rail, and work your way to the opposite side.

**NOTE:** Be sure to fully seat one end of the rubber strip against the end cap before progressing.

