


KNAPHEIDE®

SINCE 1848

Dump Bodies



Standard Features

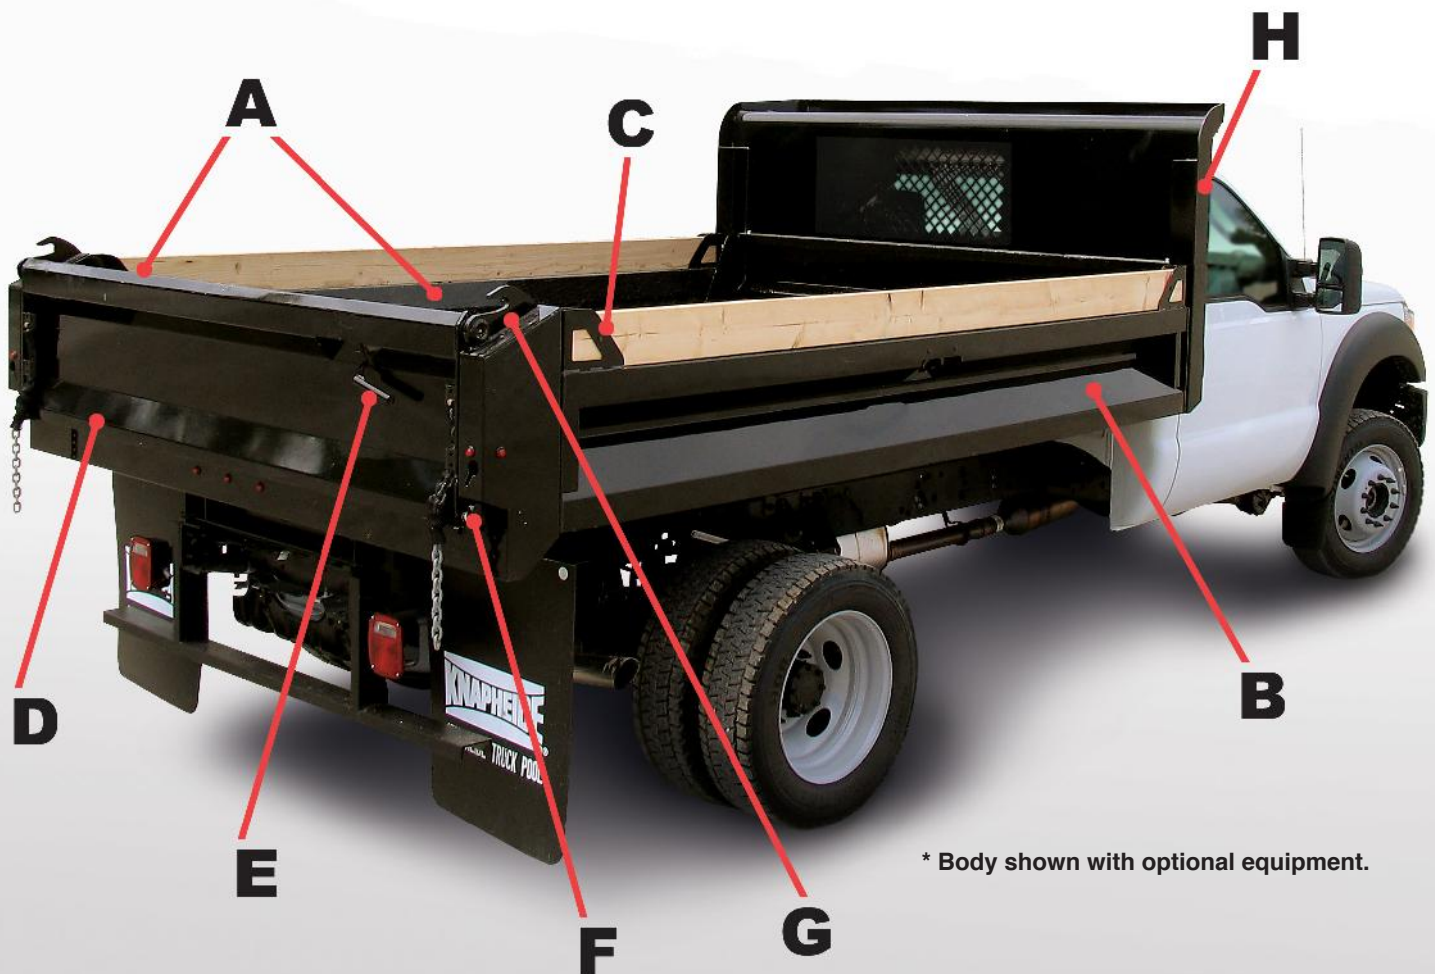

* Body shown with optional equipment.

- A)** Sides and tailgate feature self-cleaning sloped top rails and lower rails
- B)** Sides are constructed of 10 gauge high tensile steel
- C)** 2x6 side board pockets on the sides at the front and rear allow for increased load capacity
- D)** Versatile double acting tailgate in order to accommodate both drop down pick-up style and spreader applications
- E)** Quick release, one-handed lever for easy drop down action on the tailgate
- F)** Toe saver brackets located on both sides of the end rail for operator safety
- G)** Rear corner posts equipped with a hook on each side for an optional tarp
- H)** Quarter cab protector constructed of 10 gauge high tensile steel with a punched window for visibility

And other features not shown above:

- Double panel tailgate construction with 12 gauge HY50 outer panel and 10 gauge HY50 inner panel
- Fully boxed long sills are constructed of 7 gauge HRCQ steel and run the entire length of the floor
- Floor is constructed of two pieces of 7 gauge HRCQ steel and is full seam welded in the center
- Understructure is crossmemberless
- Corrosion protection is provided through complete immersion in Knapheide's 12 stage electrodeposition prime paint system
- Bodies are fully protected with Knapheide's water based undercoat

Available Models

Fixed Side Models				Nominal Dimensions		Recommended Hoist	
Model	Chassis	Weight	Capacity (Yards)	Length	Side Height	Model	Capacity
KDBF912A	60 CA/FORD	1,353	2.42	9' 2"	12"	KHA-1516SF	8.7 Tons
KDBF916A	60 CA/FORD	1,447	3.22	9' 2"	16"		
KDBF1112A	84 CA/FORD	1,589	2.95	11' 2"	12"	KHA-1520SF	8.6 Tons
KDBF1116A	84 CA/FORD	1,694	3.94	11' 2"	16"		

Drop Side Models				Nominal Dimensions		Recommended Hoist	
Model	Chassis	Weight	Capacity (Yards)	Length	Side Height	Model	Capacity
KDBDS912A	60 CA/FORD	1,348	2.42	9' 2"	12"	KHA-1516SF	8.7 Tons
KDBDS916A	60 CA/FORD	1,430	3.22	9' 2"	16"		
KDBDS1112A	84 CA/FORD	1,556	2.95	11' 2"	12"	KHA-1520SF	8.6 Tons
KDBDS1116A	84 CA/FORD	1,644	3.94	11' 2"	16"		




KDBDS912A w/ Straight Cab Protector



KDBDS1112A w/ Straight Cab Protector

Subframe Hoists

- ED models are powered by a 12 volt pump with a pendant switch control
- DC models are powered by a PTO direct mount pump with push/pull control cables
- Double acting hoist provides power up and down
- Rugged steel lift arm construction provides stable lifting with smooth movement up and down

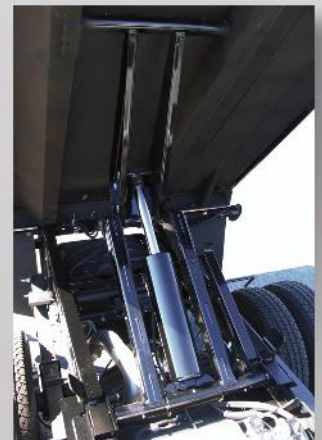

Cab Protectors

Style	Model Number	Application	Height
Straight	KCP-025S21A-P	2-3 Yard Dumps	21.5"
	KCP-025S17A-P	3-4 Yard Dumps	17.5"



Straight Cab Protector

Style	Model Number	Application	Height
Tapered	KCP-025T21A-P	2-3 Yard Dumps	21.5"
	KCP-025T17A-P	3-4 Yard Dumps	17.5"



Tapered Cab Protector

Popular Options

- Metering chute installed in tailgate for controlled delivery of material
- Oval LED Stop/Tail/Turn lights in rear corner posts
- Back up-Alarm / Body Raise indicator
- 2" x 6" Polyboard sideboard extensions fit in bed side pockets
- Crank style pull tarp with mounting brackets for attaching to cab protector
- Window shade style pull tarp with mounting brackets for attaching to cab protector
- Frame mounted underbody toolboxes for additional storage
- ICC bumper to meet DOT under ride protection requirements
- Class V receiver hitch with 2.5" receiver opening

Because Rust Never Sleeps

Rust shouldn't be a concern when you buy quality Knapheide products. To give you the best protection from rust and corrosion, we installed our state of the art, custom-designed electrodeposition prime paint system. Our E-coat system bonds paint to steel by an electroplating process, to give you a superior coat of primer resulting in better corrosion protection compared to spraying methods. Complete immersion in our E-coat results in a prime coat that provides the best chemical and solvent resistance. Rust never sleeps, and neither does our E-coat protection so you should never worry about the quality of your Knapheide products.



DUMP

3

- No rust through
- Free from defects in workmanship
- Free from defects in materials

Year Limited Warranty

The Knapheide Manufacturing Company
1848 Westphalia Strasse
Quincy, Illinois 62305

(217) 222-7131

www.knapheide.com

knapheide@knapheide.com

L34F 5M 0211 G



SINCE 1848

Copyright© 2010 The Knapheide Manufacturing Company

For more information:



Specifications subject to change without notice.

Some models shown with optional equipment.